



## PHX-2 Proportioner

3000 psi (207 bar) hydraulic proportioner ideal for fast curing, plural component coatings.




Applications include:

Roofing	Pour foam
Foam insulation	Polyurea coatings
Polyurethane coatings	

Storm Machinery's range of air-driven, plural spray proportioners are recommended for both commercial and industrial spraying of foam, polyurea, polyurethane and other fast curing, two component coatings.

*strictly superior*

MODEL	PHX-2
Output	(6.43 liters/min)
Max Working Pressure	3,000 psi (206 bar)
Max Hose Length	64 m w/70V Trans 94.5 m w/90V Trans 121.9 m w/120V Trans
Heater Wattage	14,000 watts Total (Single Heater)
Hose Heating Power	70 Volt, 90 Volt or 120 Volt
Max Fluid Temperature	190 F (87.7 C)
Main Voltage	1 x 208-230V, 50/60 Hz
Electrical @	108A-14,000W heaters
Main Voltage	3 x 208-230V, 50/60 Hz, 3 x 380V, 50/60 Hz
Electrical @	69A-14,000W heaters
Dimensions	44" w x 22" d x 54" h (111 cm x 55 cm x 137 cm)
Weight	188 kg

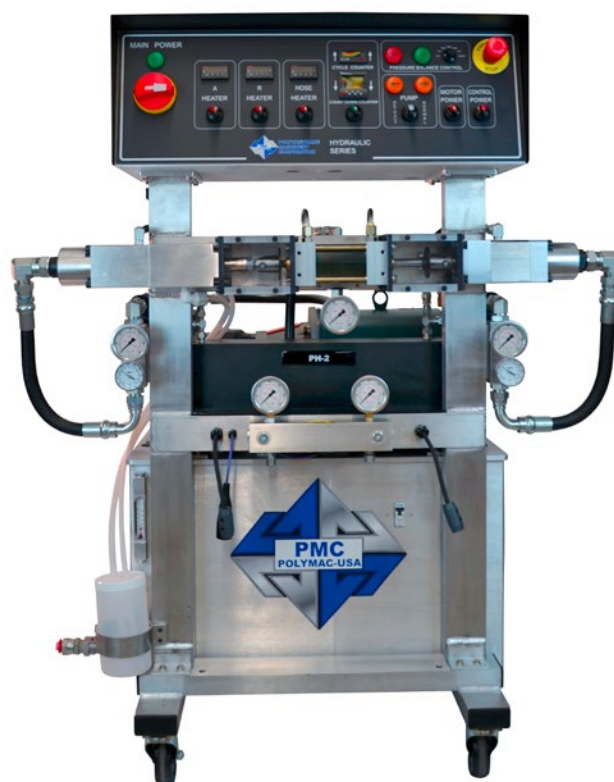

**Standard Features:**  
 Open frame / lightweight design  
 Digital, automatic temperature control  
 Inlet monitoring kit  
 Hose heat tap setting  
 New open clevis design  
 Point to point wiring



**Advantages:**  
 Economically priced  
 Pressure balance control (PBC)  
 Selectable count-down device  
 Elimination of circuit boards on console  
 Single heater  
 Benchmark in easily serviceable ball checks



*Larger sizes available on request!*

# AP-2 Purge Gun

Air purge spray/pour gun for foam & coatings.

High pressure braided heated hose & heated whip hose available.



MODEL	AP-2
Weight (w/o coupling block)	1.05 kg
Weight (w/coupling block)	1.30 kg
Maximum Working Pressure	3,500 psi (241 bar)
Maximum Air Pressure	125 psi (8.6 bar)
Maximum Output	50 lbs/min (22.7 kg)
Minimum Output	3.3 lbs/min (1.5 kg)
Dimensions	7.5"H x 3"W x 6.5" L (19cm x 7.6cm x 16.5 cm)


### Advantages:

- Lightweight, compact design
- Simple disassembly & maintenance access
- Separate hardened pattern control tip (PCT)
- Short trigger stroke
- Series of air passages for tip blow-off


### Standard Features:

- Immediate spray pattern development
- Full range of round and flat PCTs
- Check valves
- Advanced pattern development and mixing
- Adhesion resistant gun finish


To view our full range of spray proportioners visit [www.stormmachinery.co.za](http://www.stormmachinery.co.za)

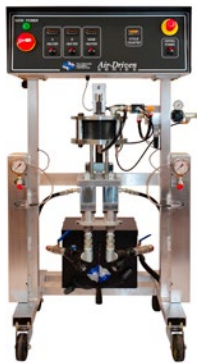

PAX - 25

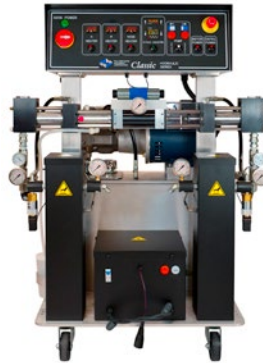

PHX - 40

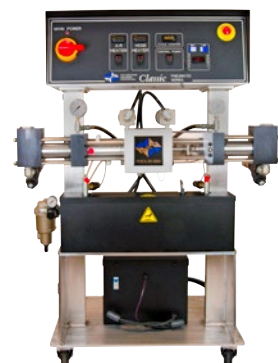

PHX - 25

### Contact:

HQ Gauteng +27 (0)11 894 2005 Kwazulu Natal: +27 (0)31 700 8332 Western Cape: +27 (0)21 510 6385 Eastern Cape: +27 (0)41 581 0280

sales@stormmachinery.co.za www.stormmachinery.co.za 0861 1 STORM (78676)

